



PVC KABELSCHUTZROHR MIT STECKMUFFE

PVC CABLE PROTECTION PIPE WITH INTEGRAL RING SEAL SOCKET

Werkstoff: PVC-U bleifrei

Ausführung: mit Steckmuffe
nach DIN 16873 und 8061 / 8062

Farbe: RAL 9005 schwarz

Anmerkung ● schlagzäh
● frost- und korrosionsbeständig
● in Rohrreihe 3 und 4 erhältlich

Trelleborg DIN-Lock **(DL)**:
eingelegerter Dichtring, geprüft
in Übereinstimmung mit EN 681-2

Trelleborg SEWER-Lock **(SL)**:
unlösbarer Dichtring, geprüft
in Übereinstimmung mit EN 681-2

Trelleborg POWER-Lock **(PL)**:
unlösbarer Dichtring, geprüft
in Übereinstimmung mit EN 681-1

Material: PVC-U without lead

Execution: with integral ring seal socket incl. seal ring
in accordance with DIN 16873 and 8061 / 8062



Colour: RAL 9005 black

Remarks: ● impact resistant
● frost- and corrosion-resistant
● row 3 and 4 available


Trelleborg DIN-Lock **(DL)**:
inserted sealing ring,
certificated in accordance with EN 681-2

Trelleborg SEWER-Lock **(SL)**:
insolvable sealing ring,
certificated in accordance with EN 681-2

Trelleborg POWER-Lock **(PL)**:
insolvable sealing ring,
certificated in accordance with EN 681-1

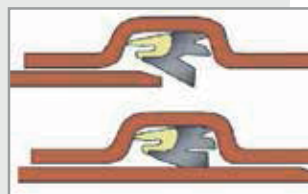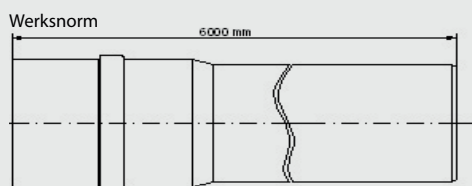

DIN-Lock-Dichtring

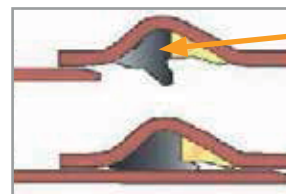

SEWER-Lock-Dichtring/
POWER-Lock-Dichtring ähnlich

unlösbar verankert/
insolvable positioned

Artikel-Nr. item-no.	DL DL	SL SL	PL PL	Abmessung mm dimensions	kg / m kg / m	VPE packing
451 500-DL	•			50 x 1,8 x 6000	0,422	1170 m/Pal.
451 501-DL	•			50 x 2,4 x 6000	0,552	1170 m/Pal.
451 502-PL			•	63 x 1,9 x 6000	0,562	630 m/Pal.
451 503-PL			•	63 x 3,0 x 6000	0,854	630 m/Pal.
451 505-DL	•			75 x 2,2 x 6000	0,782	438 m/Pal.
451 506-DL	•			75 x 3,6 x 6000	1,220	438 m/Pal.
451 507-PL			•	90 x 2,7 x 6000	1,130	378 m/Pal.
451 508-PL			•	90 x 4,3 x 6000	1,750	378 m/Pal.
451 509-SL		•		110 x 3,2 x 6000	1,640	516 m/Pal.
451 510-SL		•		110 x 5,3 x 6000	2,610	516 m/Pal.
451 511-SL		•		125 x 3,7 x 6000	2,130	360 m/Pal.
451 512-SL		•		125 x 6,0 x 6000	3,340	360 m/Pal.
451 513-PL			•	140 x 4,1 x 6000	2,650	318 m/Pal.
451 514-PL			•	140 x 6,7 x 6000	4,180	318 m/Pal.
451 515-SL		•		160 x 4,7 x 6000	3,440	234 m/Pal.
451 516-SL		•		160 x 7,7 x 6000	5,470	234 m/Pal.
451 517-SL		•		200 x 4,0 x 6000	3,700	84 m/Pal.
451 518-SL		•		200 x 5,9 x 6000	5,505	84 m/Pal.